

## MANUAL

### SIBERIA PROFESSIONAL WIRING KIT

**BLACK (85)** = - TO CHASSIS GROUND/-12V  
**DC RED (30)** = +12V DC (30A FUSE)  
**BROWN (86)** = HIGH BEAM SIGNAL  
**BLUE (87a)** = SECOND OUTPUT\*  
**RED/BLACK (85 & 87)** = DT-2 OUTPUT


#### CONVERTER DT-4 TO DT-2

If your lamp has a duo color position light and a DT-4 connector, use this converter.

**AMBER** = POSITION LIGHT COLOR 1  
**WHITE** = POSITION LIGHT COLOR 2



Scan the QR-code to get more installation tips.

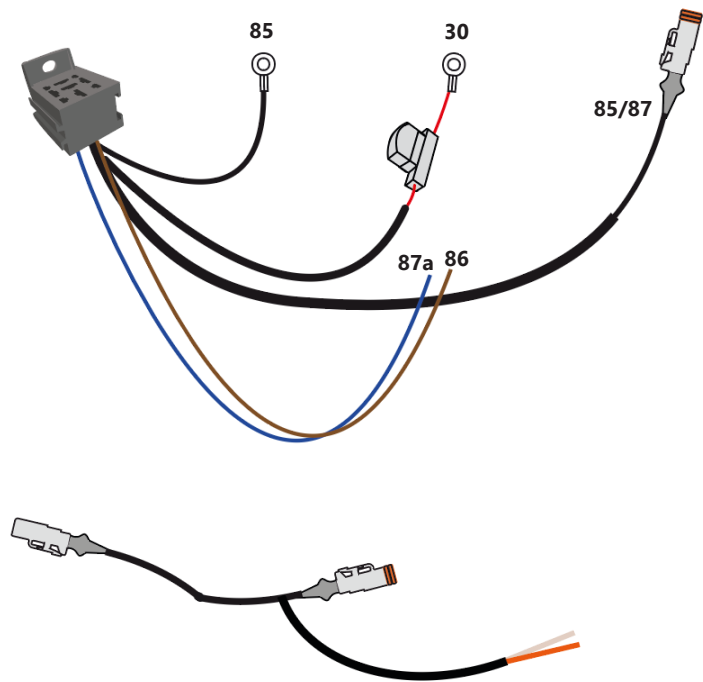

#### READ THIS BEFORE INSTALLATION

READ ALL INSTRUCTIONS AND STUDY DIAGRAMS BEFORE INSTALLING YOUR NEW WIRING KIT.

#### INSTALLATION

Only for 12V DC.  
30A fuse. 30A relay.  
Max 145W with DT.  
Max 360W if the DT is cutted.

The kit includes: Wiring kit, 2x blue duraseal, cable clamp, 1x DT-converter DT-4 to DT-2.

We recommend that you cut cable 85/87 (minimum 50cm from relay) with the DT connector and shorten it to the desired length to get a nicer installation without a lot of excess cable lying around.

When you have cut the desired length from the cable, you use the included duraseal to splice the cables, and the included cable clamp is used to splice the protective hose.

Tip: Be sure to do all the wiring while the cable is cut.

Blue cable (87a) second output can be used with a multifunctional relay.

#### WARNING!

Make sure that the cable does not touch parts that could become hot, and cause the cable to melt. Do not use higher volts than the product description states.